


1 .

2 .

3 .

Size m	MM m	MM m	
4.0	4.0± 0.1	4.2± 4%	GB/T 13542.2-2009/4
4.3	4.3± 0.1	4.5± 4%	
4.5	4.5± 0.1	47± 4%	

	mm	700± 2, 910± 2, 1010± 2 700± 2, 910± 2, 1010± 2	
D <sub>0</sub>	mm		
D	mm	350-550	

4 .

3 . 7 . 10 . 15...

BOPET


MM

5 .

Item	Unit	Typical Values	Testing Standard	
Density	g/ . <sup>3</sup>	1.400± 0.005	GB/T 13542.2-2009/11	
Melting Point		256	GB/T 13542.2-2009/23	
Tensile Strength	MD	MPa	240	GB/T 13542.2-2009/11
	TD	MPa	280	GB/T 13542.2-2009/11
Elongation at break	TM	%	100	GB/T 13542.2-2009/11
	TD	%	90	GB/T 13542.2-2009/11

Elastic Modulus	MD	MPa	3500	GB/T 13542.2-2009/11
	TD	MPa	3500	GB/T 13542.2-2009/11
Thermal Shrinkage	MD	%	2.0	GB/T 13542.2-2009/23 150 /30min
	TD	%	0.5	
( / ) Coefficient of Friction (Static/Sliding)			0.3-0.5	GB/T 10006-1988
Surface Roughness				

5.

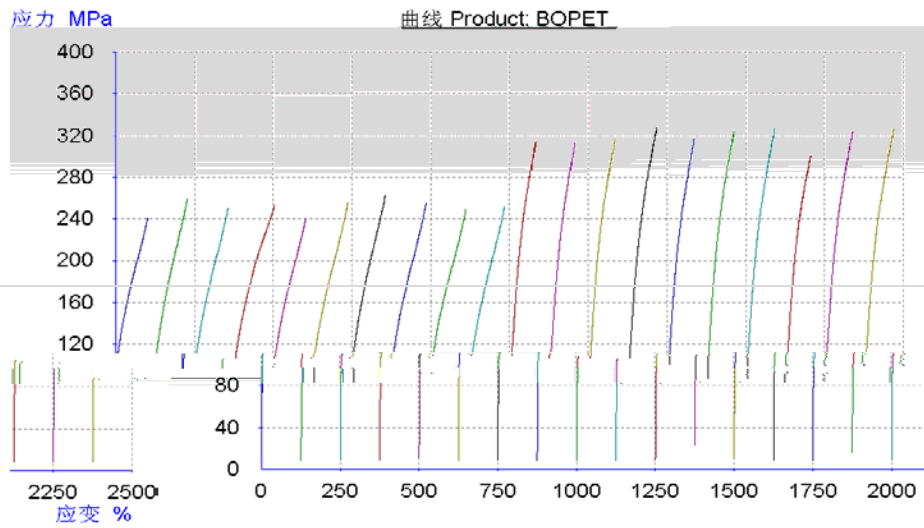

7.

4mm

( )






8.

1



9.

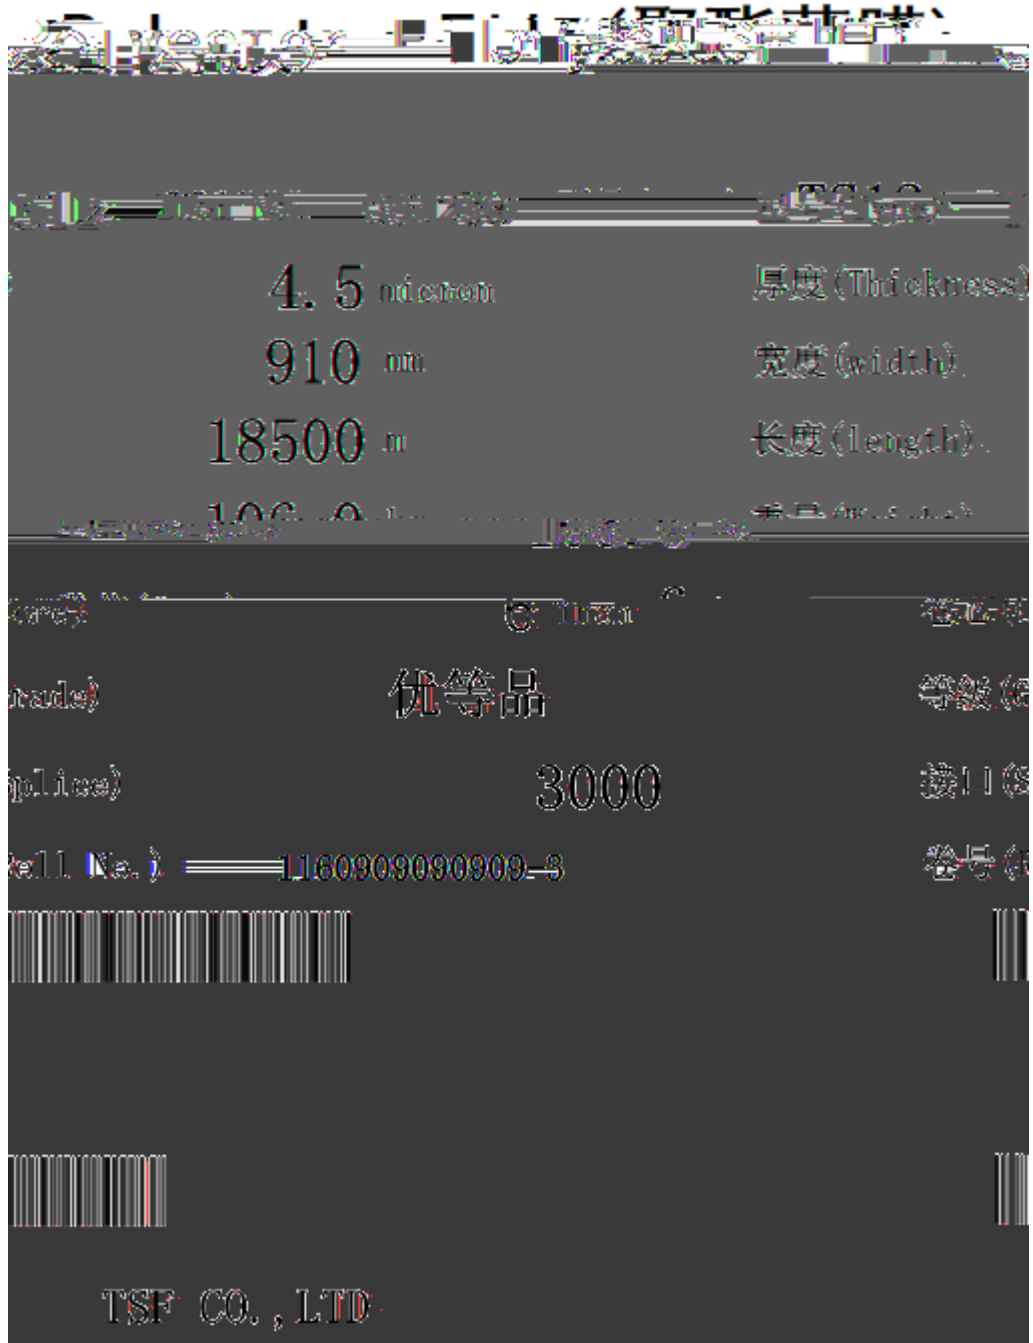



1.1.

1.1.1.

1.1.1.1. . . . . . :

1.1.1.2. . . . . . : SC44 .

SC44 ----- SKC

TS12 -----

1.1.1.3. . . . . . : 4.5 . m . . . . . 910mm . 18500m .

1.1.1.4. . . . . . : 106.0kg .

1.1.1.5. . . . . . : . . . . . 6 . . . . .

1.1.1.6. . . . . . :

1.1.1.7. . . . . . :

1.1.1.8. . . . . . : 2160524060101-2 .

1.1.2. . . . . . :

. . . . . : 2160524060101-2

2 16 05 24 06 01 01 -2

No.



-2

-3